

Models:

- 13401 — 3,400 RPM
13411 — 3,400 Versatility Kit

.7 Hp European Dynisher


Air Motor and Machine Parts

WARNING

Always operate, inspect and maintain this tool in accordance with the Safety Code for portable air tools (ANSI B186.1) and any other applicable safety codes and regulations. Please refer to Dynabrade's Warning/Safety Operating Instructions for more complete safety information.

Index Key

No.	Part	Description
1	53163	Handle Assembly
2	96278	Screw Assembly (3)
3	53159	Shroud
4	40029	Cam Lock
5	01678	Screw
6	53167	Handle Support
7	02552	Bearing
8	53182	Gear Shaft (2)
9	53180	Planetary Carrier
10	53193	Gear (2)
11	04026	Bearing (4)
12	53191	Ring Gear
13	02552	Bearing
14	13433	Arbor Adapter
15	13432	Spindle Cover
16	13443	Spacer
17	13434	Flange
18	13441	Flange
19	96264	Screw
20	01007	Bearing
21	01121	Shim Pak
22	53183	Front End Plate
23	01010	Spacer
24	04017	Rotor
25	01185	Blades (4/pkg.)
26	01028	Cylinder
27	50767	Pin
28	13440	Rear End Plate
29	02649	Bearing
30	04014	Screw
31	01041	Grease Fitting
32	13408	Housing Assy. (includes 13436 Bushing & 01041 Grease Fitting)
33	01089	Throttle Lever Assembly
34	13436	Bushing
35	01017	Pin
36	13438	Handle Grip
37	13435	Valve Stem
38	13439	Ball
39	07145	Spring
40	13437	Speed Regulator
41	01024	O-Ring
42	13428	Packing
43	13427	Regulator Plug
44	01565	Air Control Ring
45	95438	O-Ring
46	95711	Retaining Ring
47	94521	Muffler Base
48	94528	Muffler
49	94522	Muffler Cap
50	95375	O-Ring
51	94526	Spacer
52	94523	Inlet Adapter
53	94519	Muffler Assy.

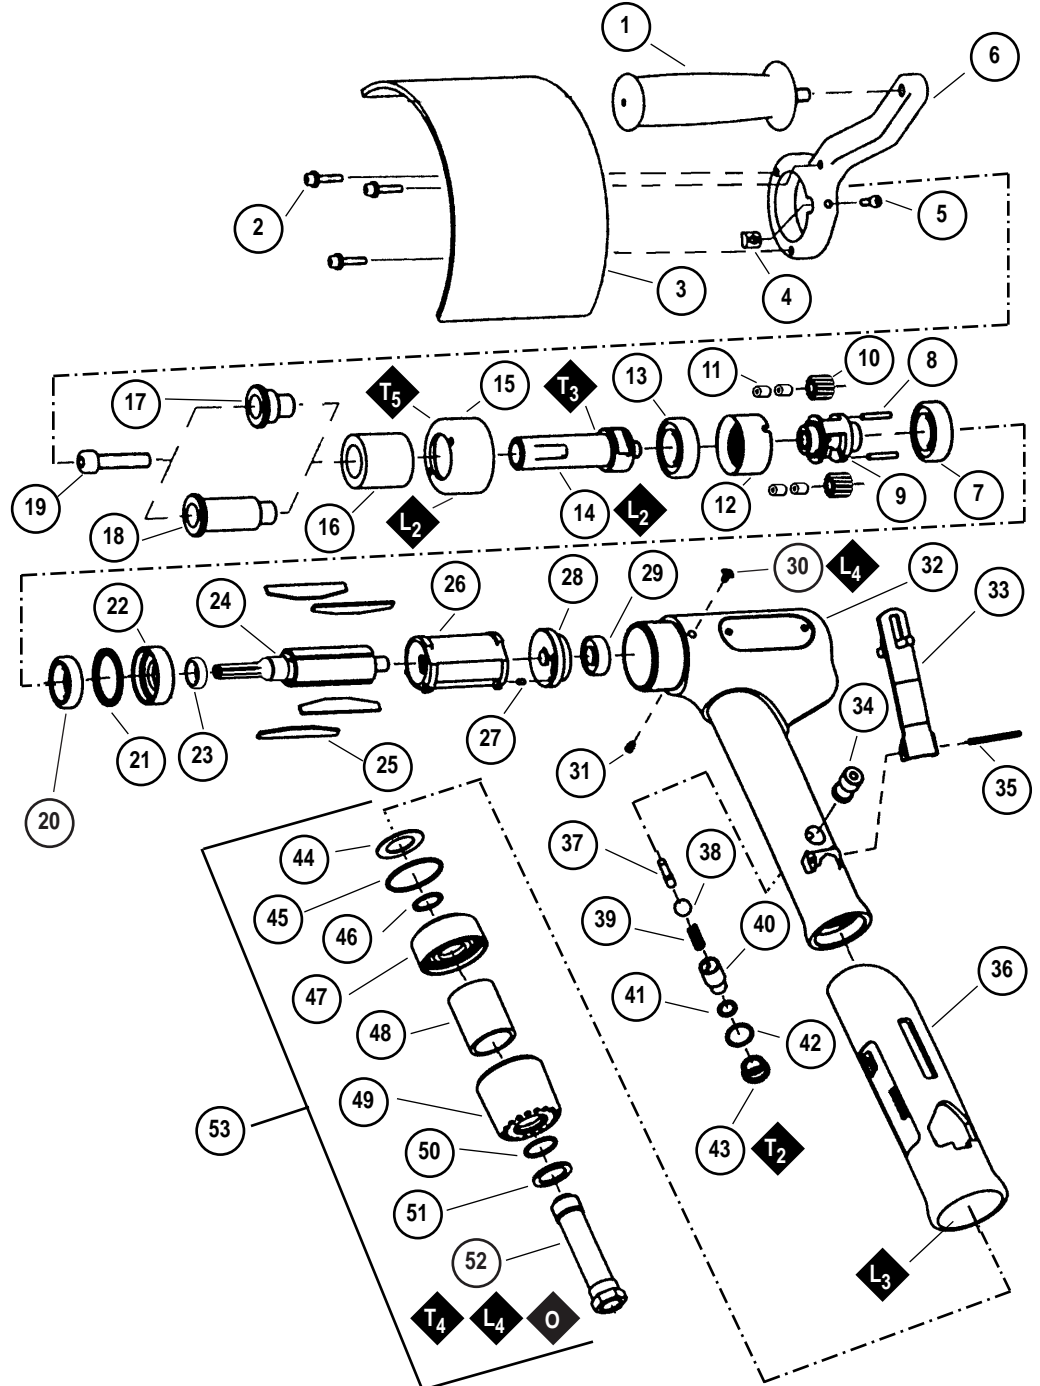

KEY

O	Oil	G	Grease
L	Loctite/Hernon: L ₂ = Loctite #271 L ₃ = Loctite #380, L ₄ = Loctite #567		
T	Torque: N•m x 8.85 = In. - lbs. T ₂ = 8.5 N•m, T ₃ = 17 N•m, T ₄ = 23 N•m, T ₅ = 28 N•m		

Important Operating, Maintenance and Safety Instructions

Carefully read all instructions before operating or servicing any Dynabrade® Abrasive Power Tool.

Warning: Hand, wrist and arm injury may result from repetitive work motion and overexposure to vibration.

Important: All Dynabrade air tools must be used with a Filter-Regulator-Lubricator to maintain all warranties.

Operating Instructions:

Warning: Eye, face and body protection must be worn while operating power tools. Failure to do so may result in serious injury or death. Follow safety procedures posted in workplace.

1. With power source disconnected from tool, securely fasten abrasive/accessory on tool.
2. Install air fitting into inlet bushing of tool. **Important:** Secure inlet bushing of tool with a wrench before attempting to install the air fitting to avoid damaging valve body housing.
3. Connect power source to tool. Be careful not to depress throttle lever in the process.
4. Check tool speed with tachometer. If tool is operating at a higher speed than the RPM marked on the tool or operating improperly, the tool should be serviced to correct the cause before use.

Maintenance Instructions:

1. Check tool speed regularly with a tachometer. If tool is operating at a higher speed than the RPM marked on the tool, the tool should be serviced to correct the cause before use.
2. Some silencers on air tools may clog with use. Clean and replace as required.
3. All Dynabrade air motors should be lubricated. Dynabrade recommends one drop of air lube per minute for each 10 SCFM (example : if the tool specification state 40 SCFM, set the drip rate of your filter-lubricator at 4 drops per minute). Dynabrade Air Lube (P/N 95842: 1pt. 473ml.) is recommended.
4. An air line filter-regulator-lubricator must be used with this air tool to maintain all warranties. Dynabrade recommends the following: 11299 Air Line Filter-Regulator-Lubricator — Provides accurate air pressure regulation, two-stage filtration of water contaminants and micro-mist lubrication of pneumatic components. Operates up to 100 CFM @ 100 PSI has 1/2" NPT female ports.
5. Use only genuine Dynabrade replacement parts. To reorder replacement parts, specify the **Model #**, **Serial #** and **RPM** of your machine.
6. A motor tune-up kit (P/N 96234) is available which includes assorted parts to help maintain motor in peak operating condition. Please refer to Dynabrade's Preventative Maintenance Schedule for a guide to expectant life of component parts.
7. Mineral spirits are recommended when cleaning the tool and parts. Do not clean tool or parts with any solvents or oils containing acids, esters, keytones, chlorinated hydrocarbons or nitro carbons.

Safety Instructions:

Products offered by Dynabrade should not be converted or otherwise altered from original design without expressed written consent from Dynabrade, Inc.

- **Important:** User of tool is responsible for following accepted safety codes such as those published by the American National Standards Institute (ANSI).
- Operate machine for one minute before application to workpiece to determine if machine is working properly and safely before work begins.
- Always disconnect power supply before changing abrasive/accessory or making machine adjustments.
- Inspect abrasives/accessories for damage or defects prior to installation on tools.
- Please refer to Dynabrade's Warning/Safety Operating Instructions Tag (Reorder No. 95903) for more complete safety information.
- **Warning:** Hand, wrist and arm injury may result from repetitive work, motion and overexposure to vibration.

Notice

All Dynabrade motors use the highest quality parts and metals available and are machined to exacting tolerances. The failure of quality pneumatic motors can most often be traced to an unclean air supply or the lack of lubrication. Air pressure easily forces dirt or water contained in the air supply into motor bearings causing early failure. It often scores the cylinder walls and the rotor blades resulting in limited efficiency and power. Our warranty obligation is contingent upon proper use of our tools and cannot apply to equipment which has been subjected to misuse such as unclean air, wet air or a lack of lubrication during the use of this tool.

One Year Warranty

Following the reasonable assumption that any inherent defect which might prevail in a product will become apparent to the user within one year from the date of purchase, all equipment of our manufacture is warranted against defects in workmanship and materials under normal use and service. We shall repair or replace at our factory, any equipment or part thereof which shall, within one year after delivery to the original purchaser, indicate upon our examination to have been defective. Our obligation is contingent upon proper use of Dynabrade tools in accordance with factory recommendations, instructions and safety practices. It shall not apply to equipment which has been subject to misuse, negligence, accident or tampering in any way so as to affect its normal performance. Normally wearable parts such as bearings, contact wheels, rotor blades, etc., are not covered under this warranty.

Machine Number	Length Inch (mm)	Weight Pound (kg)	Machine Diameter	Wheel Arbor Dia. Inch (mm)	Air Flow Rate SCFM (LPM)	Sound Level	Motor HP (W)	Motor RPM	Max. SFPM (SMPM)
13401	10.8" (274)	4.56 (2.07)	1-13/16" (46 mm)	.75 (19 mm)	44 (1,246)	88 dBA	.70 (522)	3,400	4450 (1350)

Additional specifications: Air Inlet Thread 1/4" (6 mm) NPT • Hose Size 3/8" (9 mm) • 90 PSI (6.2 Bars)

Disassembly/Assembly Instructions - Dynisher

Important: Manufacturer's warranty is void if tool is disassembled before warranty expires.

Please refer to parts breakdown for part identification.

Motor Disassembly:

1. Disconnect tool from power source. Remove pneumatic wheel or accessory from spindle.
2. Loosen **01678** Lock Screw and remove handle assembly. Remove flange and spacer from motor shaft.
3. Secure motor housing using padded vise with motor spindle facing upwards.
4. Using an adjustable pin wrench, remove **13432** Spindle Cover.
5. Remove **04014** Set Screw from housing.
6. Pull **13433** Arbor Adapter and planetary carrier assembly from housing.
7. Press planetary carrier assembly from rear **02552** Bearing. Remove ring gear and gears from **53180** Planetary Carrier.
8. Secure planetary carrier in vise and remove **13433** Arbor Adapter. Press carrier from front **02552** Bearing.
9. Grab onto **04017** Rotor/Pinion and pull motor assembly from motor housing.
10. Press **04017** Rotor/Pinion from **13440** Rear Bearing Plate. Press **02649** Rear Bearing from rear bearing plate.
11. Remove **01028** Cylinder and **01185** Rotor blades from rotor.
12. Press rotor pinion assembly through **01007** Front Bearing and **53183** Front Bearing Plate.

Motor disassembly complete.

Housing Disassembly:

1. Position housing in padded vise with air inlet facing up.
2. Remove air fitting by securing **94523** Inlet Adapter with a wrench and twist air fitting from inlet adapter.
Important: **94523** Inlet Adapter must be secured before attempting to remove air fitting to avoid damaging valve body housing.
3. Remove **94523** Inlet Adapter.
4. Remove **95711** Retaining Ring from inlet adapter and separate **94521** Muffler Base from **94522** Muffler Cap. Remove **94528** Felt Muffler.
5. Remove **01565** Air Control Ring from housing.
6. Using a 2.5mm drift pin, tap **01017** Pin from housing and remove throttle lever assembly.
7. Remove **13427** Plug. Pull **13437** Speed Regulator from housing and remove **01024** O-Rings, **07145** Spring, **13439** Ball, and **13435** Valve Stem.

Disassembly complete.

Motor Reassembly:

Important: Be sure parts are clean and in good repair before reassembly. Follow all grease, oil, and torque specifications.

1. Place **04017** Rotor in padded vise with threaded spindle facing upwards.
2. Slip **01010** Spacer onto **04017** Rotor.
3. Place a .002" shim into **53183** Front Bearing Plate as an initial spacing and slip **01007** Bearing into plate. **Note:** **01121** Shim Pak contains .001" and .002" shims.
4. Press bearing/bearing plate assembly onto rotor.
5. Check clearance between rotor and bearing plate by using a .001" feeler gauge. Clearance should be at .001" to .0015". Adjust clearance by repeating steps 2-4 with different shim if necessary.
6. Once proper rotor gap clearance is achieved, install well lubricated **01185** Blades (4) into rotor slots. Dynabrade recommends using their **95842** Air Lube.
7. Install cylinder over rotor/pinion. Be sure air inlet holes of cylinder face away from **53183** Front Bearing Plate.
8. Press **02649** Rear Bearing into **13440** Rear Bearing Plate. Press bearing/bearing plate assembly onto rotor. Be sure that pin and air inlet holes line up with pin slot and air inlet holes in cylinder.
Important: Fit must be snug between bearing plates and cylinder. If too tight, rotor will not turn freely. Rotor must then be lightly tapped at press fit end so it will turn freely while still maintaining a snug fit. A loose fit will not achieve the proper preload of motor bearings.
10. Secure motor housing in padded vise so motor cavity faces upwards. Install motor assembly into housing. Be sure motor inlet is facing the handle and it drops all the way into housing
11. Press front **02552** Bearing onto front end of **53180** Planetary Carrier.
12. Apply #271 Loctite® to **13433** Arbor Adapter and install onto **53180** Planetary Carrier (torque 17.0 N•m/150 in. - lbs.).
13. Install **53193** Gears, **04026** Bearings and **53182** Gear Shafts onto planetary carrier.
14. Slip **53191** Ring Gear over gears and press rear **02552** Bearing onto planetary carrier.
15. Apply two drops of #271 Loctite® to threads of **13432** Spindle Cover.
16. Install **13432** Spindle Cover onto housing to secure motor (torque 28 N•m/250 in. - lbs.).

Motor Reassembly Complete.

Housing Reassembly:

1. Install **13438** Handle Grip.
2. Insert **13435** Valve Stem through housing and into hole in **13436** Bushing.
3. Insert **13439** Ball, **07145** Spring, **13437** Speed Regulator with **01024** O-Ring in place.
4. Install **13428** Packing onto **13427** Regulator Plug. Secure plug in place torque 8.5 N•m/75 in. - lbs.
5. Insert **94528** Muffler into **94522** Muffler Cap. Install **94521** Muffler Base onto muffler cap.
6. Install **94538** O-Ring into groove on muffler base. Place **95375** O-Ring and **94526** Spacer into recessed area of muffler cap.

(continued on next page)

Disassembly/Assembly Instructions (continued)

7. Slip **94523** Inlet Adapter through muffler assembly and install **95711** Retainer Ring into groove on inlet adapter.
8. Install **01565** Air Control Ring into housing.
9. Apply Loctite® #567 to threads of **94523** Inlet Adapter and install entire muffler assembly onto housing inlet (torque 23.0 N•m/200 in. - lbs.).
10. Replace air fitting. Secure inlet adapter with a wrench before tightening air fitting.
11. Install throttle lever and **01017** Pin.

Tool Assembly is complete. Please allow 30 minutes for adhesives to cure before operating tool.

Important: Motor should now be tested for proper operation at 90 PSI. If motor does not operate properly or operates at a higher RPM than marked on the tool, the tool should be serviced to correct the cause before use. Before operating, place 2-3 drops of Dynabrade Air Lube (P/N **95842**) directly into air inlet with throttle lever depressed. Operate tool for 30 seconds to determine if tool is operating properly and to allow lubricating oils to properly penetrate motor

Loctite® is a registered trademark of Loctite Corp.

Optional Accessories



Dynaswivel®

Swivels 360° at two locations which allows an air hose to drop straight to the floor, no matter how the tool is held.

- **94300** Composite Swivel 1/4" NPT.
- **95461** 3/8" NPT.
- **95462** 1/2" NPT.



96234 Motor Tune-Up Kit

- Includes assorted parts to help maintain motor in tip-top shape.



94495 Dynacushion® Pneumatic Wheel

- 100mm Diameter x 90mm Wide.
- Inflates to 20 PSI maximum.
- 100mm wide x 289mm long belt size.



94465 Wheel Inflation Tool

- Controlled inflation/deflation of pneumatic wheel.
- Has 1/4" female thread; fits 1/4" air hose.
- **95633** Nozzle Replacement available.

Visit our new Web Site at <http://www.dynabrade.com>



DYNABRADE, INC., 8989 Sheridan Drive • Clarence, NY **14031**-1490 • Phone: (716) 631-0100 • Fax: 716-631-2073 • International Fax: 716-631-2524
DYNABRADE EUROPE S.à.r.l., Zone Artisanale • L-5485 Wormeldange—Haut, Luxembourg • Telephone: 352 76 84 94 • Fax: 352 76 84 95

©DYNABRADE, INC., 1998

PRINTED IN USA